300x210mm

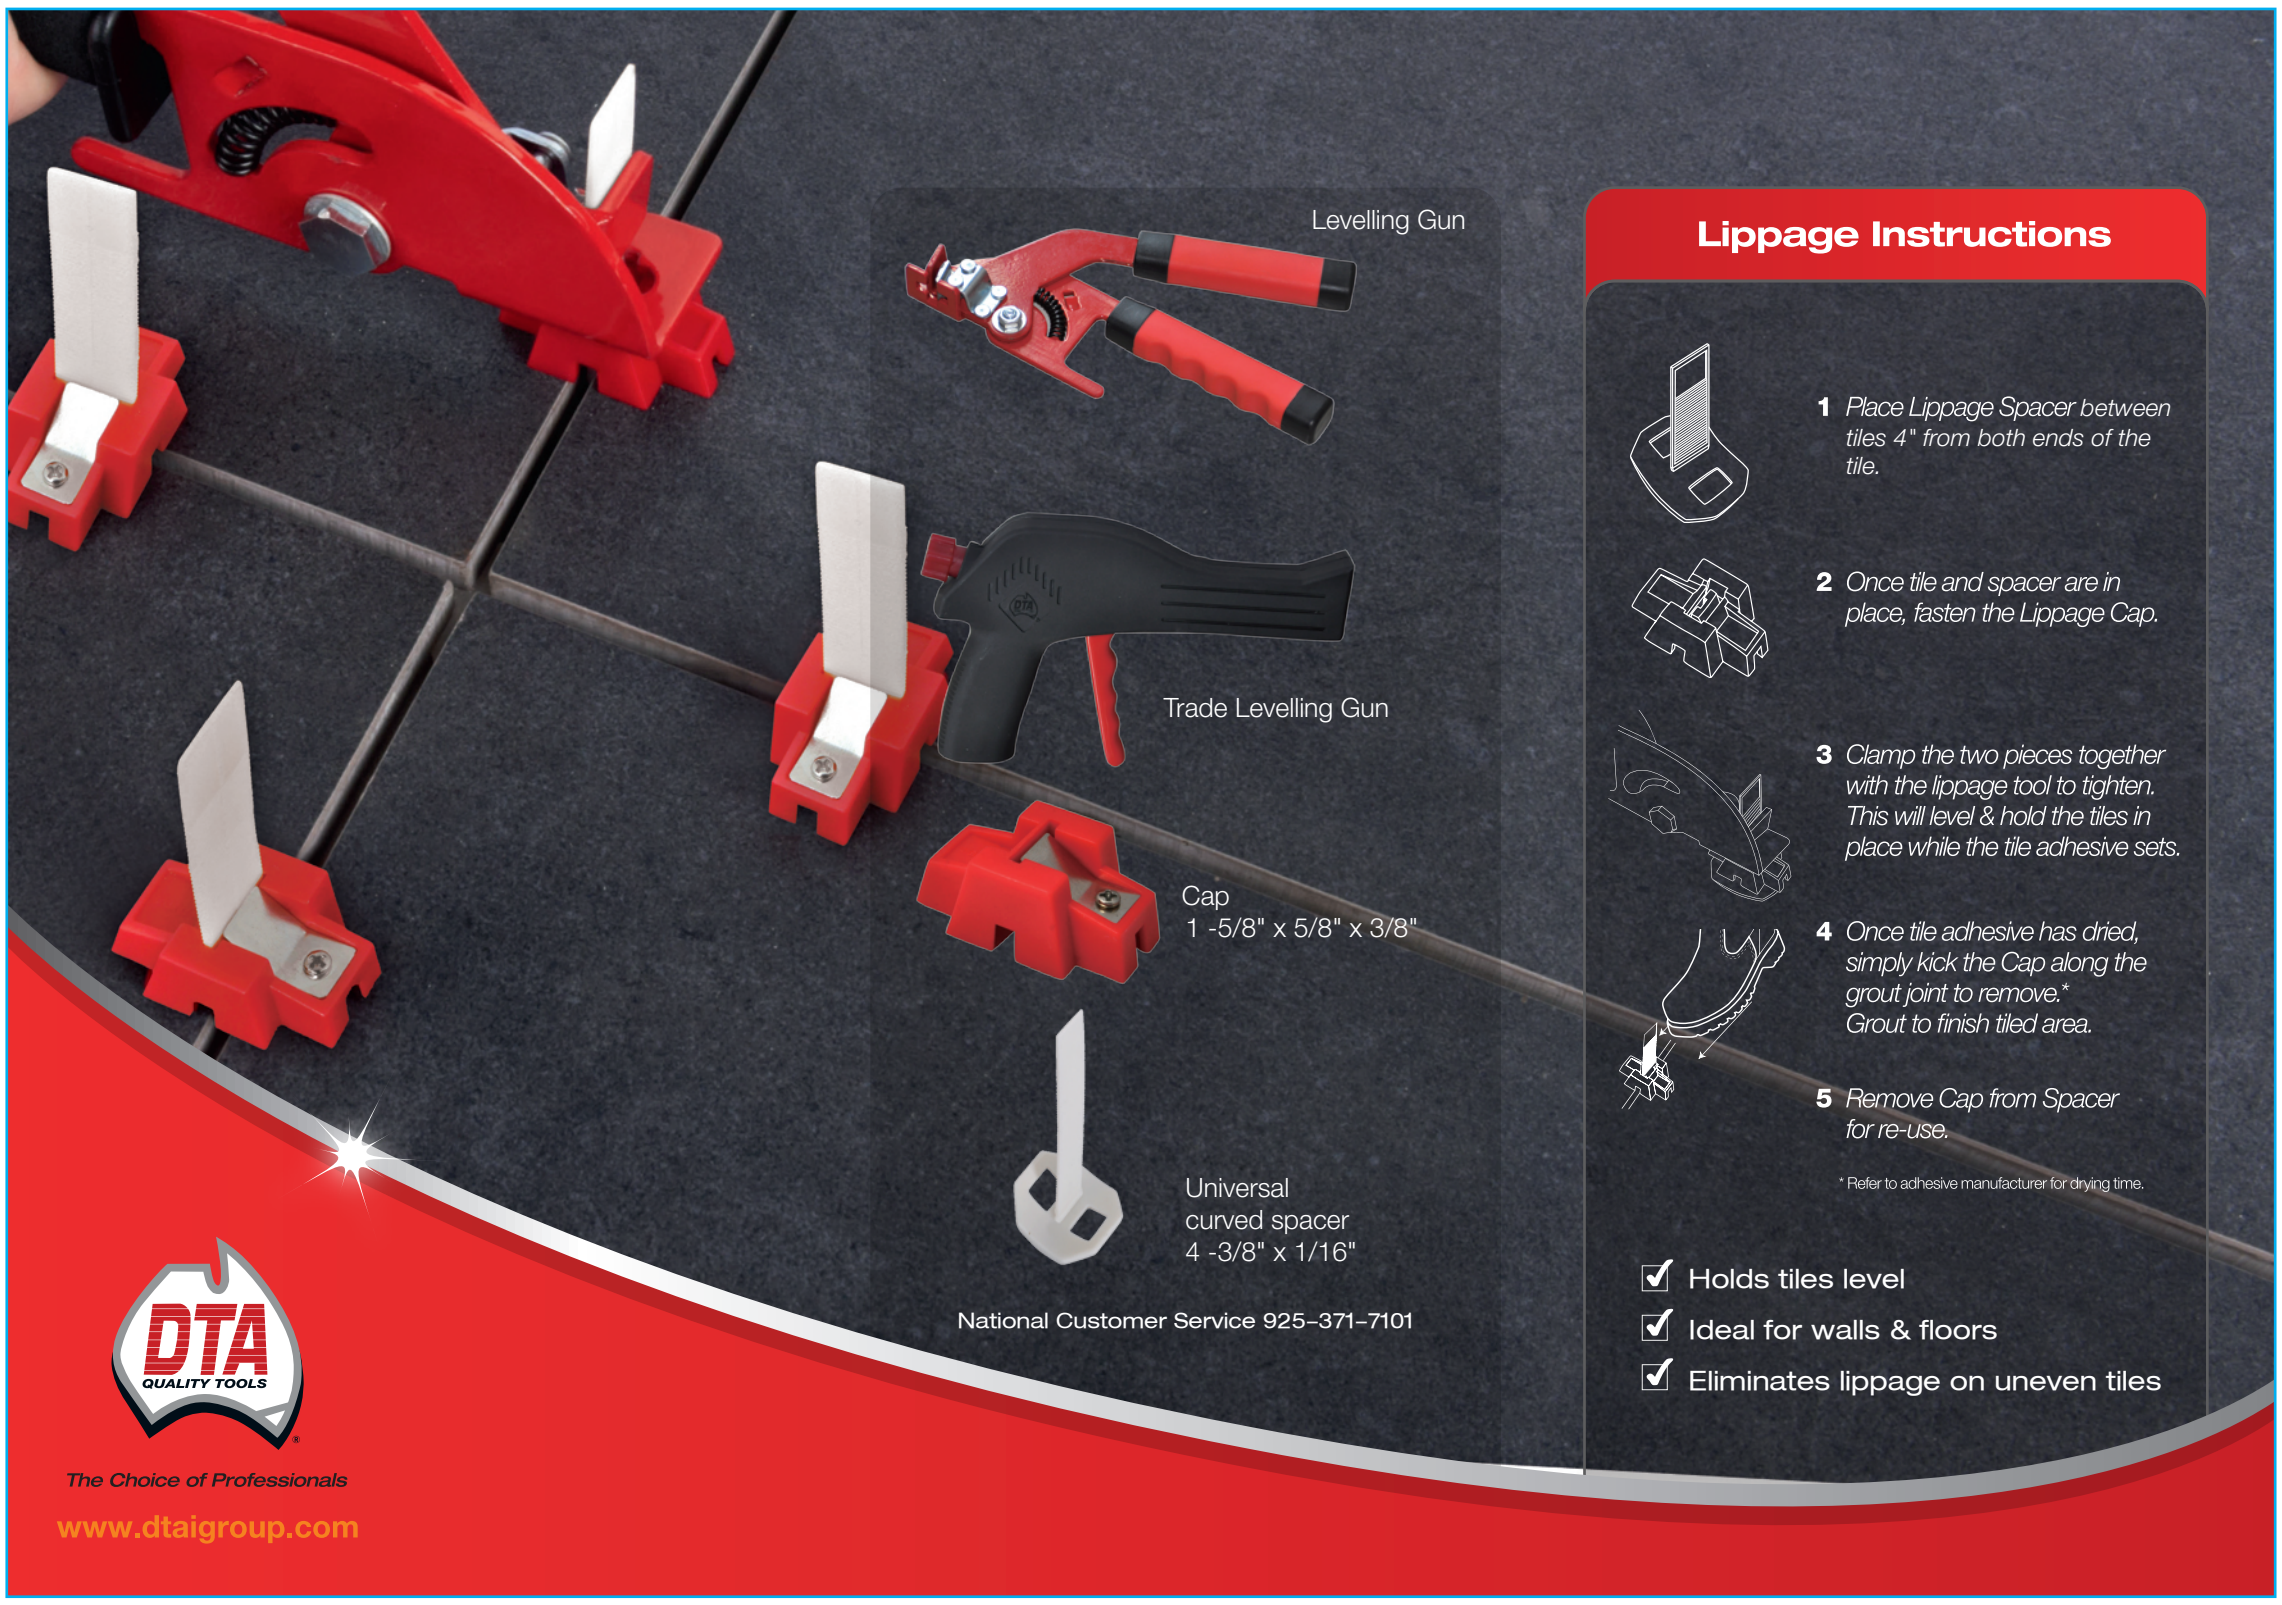
Levelling Gun
Trade Levelling Gun
Cap
1 -5/8" x 5/8" x 3/8"
Universal
curved spacer
4 -3/8" x 1/16"
National Customer Service 925–371–7101
Lippage Instructions
1 Place Lippage Spacer between tiles 4" from both ends of the tile.
2 Once tile and spacer are in place, fasten the Lippage Cap.
3 Clamp the two pieces together with the lippage tool to tighten. This will level & hold the tiles in place while the tile adhesive sets.
4 Once tile adhesive has dried, simply kick the Cap along the grout joint to remove.* Grout to finish tiled area.
5 Remove Cap from Spacer for re-use.
* Refer to adhesive manufacturer for drying time.
Holds tiles level
Ideal for walls & floors
Eliminates lippage on uneven tiles
DTA QUALITY TOOLS
The Choice of Professionals
www.dtaigroup.com

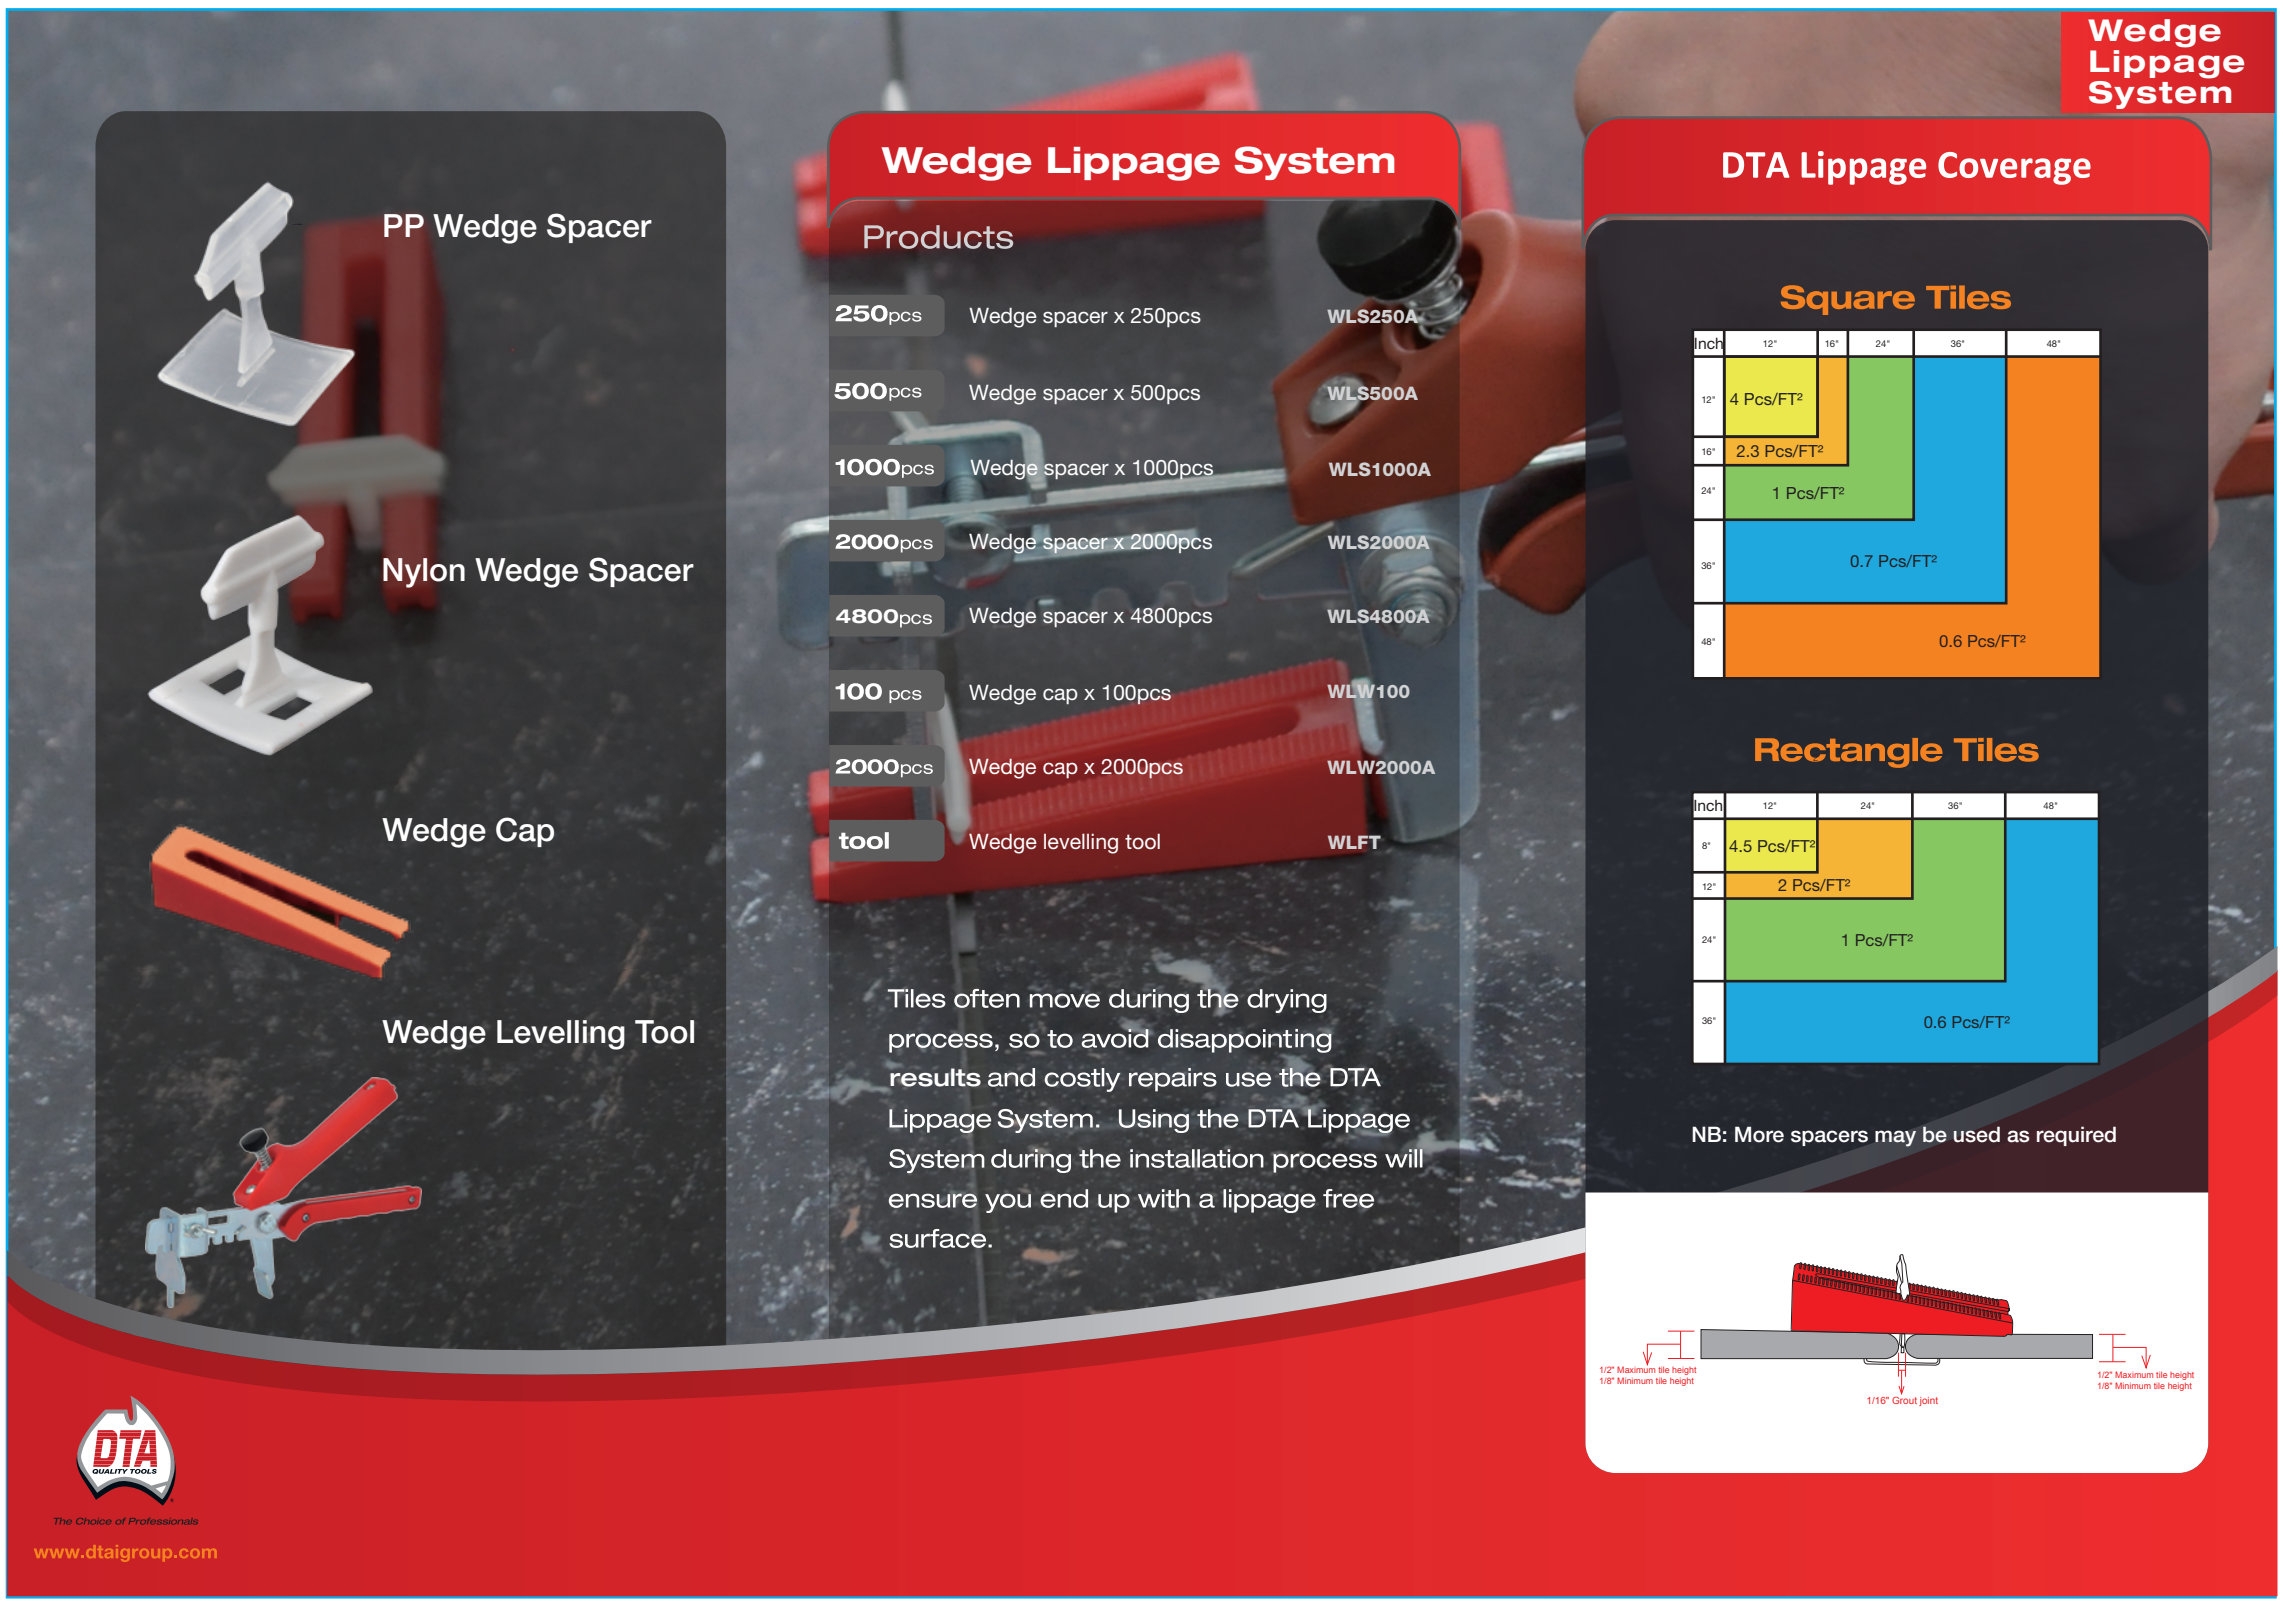
Wedge Lippage System
PP Wedge Spacer
Nylon Wedge Spacer
Wedge Cap
Wedge Levelling Tool
Wedge Lippage System
Products
250pcs Wedge spacer x 250pcs WLS250A
500pcs Wedge spacer x 500pcs WLS500A
1000pcs Wedge spacer x 1000pcs WLS1000A
2000pcs Wedge spacer x 2000pcs WLS2000A
4800pcs Wedge spacer x 4800pcs WLS4800A
100 pcs Wedge cap x 100pcs WLW100
2000pcs Wedge cap x 2000pcs WLW2000A
tool Wedge levelling tool WLFT
Tiles often move during the drying process, so to avoid disappointing results and costly repairs use the DTA Lippage System. Using the DTA Lippage System during the installation process will ensure you end up with a lippage free surface.
DTA Lippage Coverage
Square Tiles
Inch 12" 16" 24" 36" 48"
12" 4 Pcs/FT²
16" 2.3 Pcs/FT²
24" 1 Pcs/FT²
36" 0.7 Pcs/FT²
48" 0.6 Pcs/FT²
Rectangle Tiles
Inch 12" 24" 36" 48"
8" 4.5 Pcs/FT²
12" 2 Pcs/FT²
24" 1 Pcs/FT²
36" 0.6 Pcs/FT²
NB: More spacers may be used as required
1/2" Maximum tile height
1/8" Minimum tile height
1/16" Grout joint
1/2" Maximum tile height
1/8" Minimum tile height
DTA QUALITY TOOLS
The Choice of Professionals
www.dtaigroup.com